

HOT WATER SYSTEM






www.waterco.com.my





Electroheat Hot Water System (HWS) adopts heating methodology via ambient air source. With air possesses excellent trait in absorbing and transferring energy, the HWS is a highly efficient mean of water heating. Due with its low operating cost, the power consumption of HWS makes up only a minimal portion of the power utilized by conventional heating approach such as natural gas and electric. HWS also resulted in little carbon emission, which makes it an environmentalfriendly method of producing hot water.

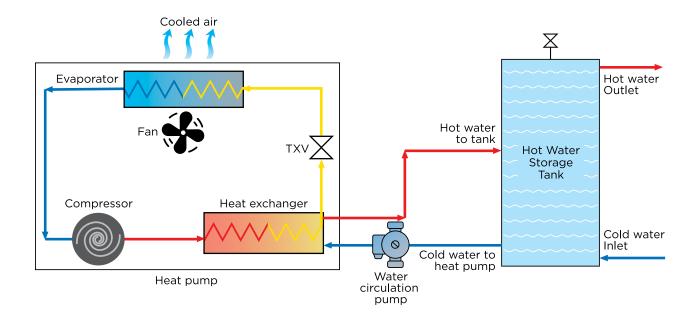

Electroheat HWS is a cost effective heating solution to cater the need of hot water in household, hospitality, healthcare and food processing sector.. The energy saving technology adopted by HWS utilizes minimal energy to produce great amount of heat.



Cost effective heating

• The heating load utilized by HWS only lies from operating the compressor and fan with low amperage. In comparison to other means of heating water, Waterco HWS saves up to 83% over propane gas, 58% over natural gas and more than 500% over electric heaters in terms of power consumption.



Energy efficient heating

• Waterco HWS only uses portion of the energy used by gas and electric heaters to produce the same amount of heat. Unlike solar heating, the HWS does not rely on the presence of sunlight for heat.




Environmentally-friendly

• The R417a used in the HWS as heating media is a high performance refrigerant, and at the same time being Ozone-friendly as compared to other conventional refrigerants.



Hot water on demand

• Storing of heated water inside a tank assures the availability of hot water for various application.

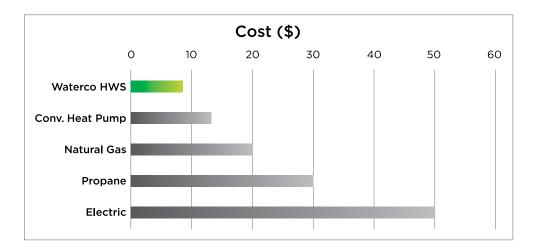




Specifications									
Model		HWS 9.5 kW	HWS 20 kW	HWS 40 kW					
Heating Capacity	kW	9.5	20	40					
Power Supply	V/Ph/Hz	240/1/50	415/3/50	415/3/50					
Input Power	kW	2.3	4.9	9.8					
Running Current	А	12.46	8.77	17.54					
Max. Input Power	kW	3.26	6.86	13.72					
Max. Running Current	А	17.44	12.28	24.55					
Refrigerant		R417a	R417a	R417a					
Compressor Type		Rotary	Scroll	Scroll					
Compressor Quantity		1	1	2					
COP Air 28°C/Water 30°C		6	6	6					
COP Air 28°C/Water 35°C		5.5	5.5	5.5					
COP Air 28°C/Water 40°C		5.1	5.1	5.1					
COP Air 28°C/Water 50°C		4.6	4.6	4.6					
COP Air 28°C/Water 55°C		4.1	4.1	4.1					
Outlet Water Temp	°C	60	60	60					
Max. Outlet Water Temp	°C	65	65	65					
Hot Water Yield	L/h	204	430	860					
Water Flow	m³/h	2.0	4.3	8.6					
Condenser		Tube in shell	Tube in shell	Tube in shell					
Water Pressure Drop	kPa	40	55	55					
Water Connection Tube	mm	DN25	DN25	DN40					
Noise	dB (A)	<55	<57	<61					
Electric Protection		I	I	L					
Mechanical Protection		IPX4	IPX4	IPX4					
Net/Gross Weight	kg	87/130	139/157	268/316					
Dimension (LxWxH)	mm	752x690x765	752x690x965	1450x702x1260					
Packing Dimension (LxWxH)	mm	840x750x900	840x750x1100	1525x805x1420					

STORAGE TANK SPECIFICATIONS								
	Dimension		Thickness					
Volume	O. Diameter	r Height Inner tank Oute		Outer casing	Material			
	(mm)	(mm)	(mm)	(mm)				
1000 L	900	2100	3.0	0.6	SS304			
2000 L	1200	2200	3.0	0.6	SS304			





Diagram of hot water storage tank

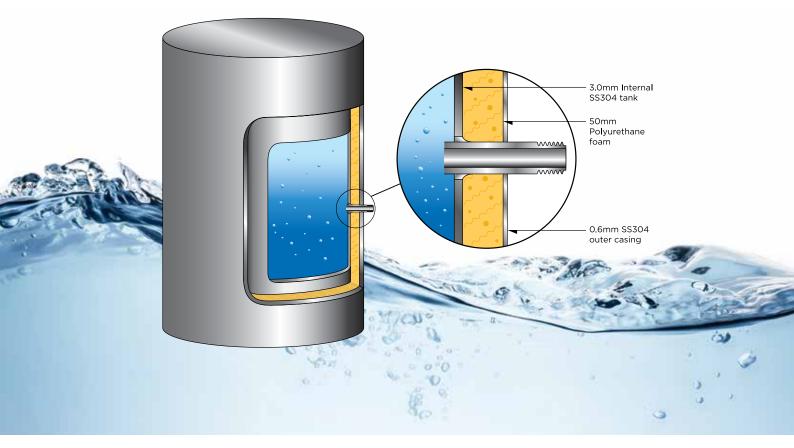

Images shown are the 9.5 kW and 20 kW HWS. Specifications and dimensions of the 40 kW HWS can be referred to the specification data.

OFFICES - AUSTRALIA

NSW - Sydney (Head Office) Tel: +61 2 9898 8600

QLD - Brisbane Tel: +61 7 3299 9900

VIC/TAS - Melbourne Tel: +61 3 9764 1211 WA - Perth

Tel: +61 8 9273 1900

SA/NT - Adelaide Tel: +61 8 8244 6000

ACT Distribution Tel: +61 2 6280 6476

OFFICES - OVERSEAS

Waterco (Europe) Limited Sittingbourne, Kent. UK Tel: +44 (0) 1795 521 733

Waterco (USA) Inc Augusta, Georgia, USA Tel: +1 706 793 7291

Waterco Canada Boucherville, Quebec, Canada Tel: +1 450 748 1421

Waterco (NZ) Limited Auckland, New Zealand Tel: +64 9 525 7570

Waterco (C) Limited Guangzhou, China Tel: +86 20 3222 2180

PT Waterco Indonesia Jakarta, Indonesia Tel: +62 21 4585 1481

Waterco Singapore Intl Pte Ltd Nehsons Building, Singapore Tel: +65 6344 2378

Waterco (Far East) Sdn Bhd Selangor, Malaysia Tel: +60 3 6145 6000









In the interest of providing better quality and value we are constantly improving and updating our products. Consequently, pictures and information on our brochures may sometimes vary slightly from models available.

ZZB2009 05/21